

CTÔRIA

CHUZHOU CHUANGLI ELECTRICAL APPLIANCES CO.,LTD.

Add: No.402 Huzhou Road, Suzhou & chuzhou Modern Industry Park,Chuzhou, Anhui, China

E-mail: sales@chuangli.com

Website: www.ctoria.com

CTÔRIA



Ctoria

Reach-in & Undercounter Refrigerators / Freezers

US. Style Cabinet (Ventilated)



About Ctoria

2008
Since

Since 2008, CHUANGLI was established and has been committing to the professional commercial refrigeration equipment development nearly 15years.

2+
Brands

Now Chuangli Group are running two brands Snooker Ice Machine &Ctoria Refrigerators, two production bases are located in Shanghai and Chuzhou city.

300+
Employees

The company has over 300 employees.

60000+
sq/m

All production is processed in a modernization workshop which covers 60,000 sq/m with high-end CNC equipment, as well as high precision test rooms.



CHUZHOU CHUANGLI ELECTRICAL APPLIANCES CO. LTD. is our professional production base who is specialized in developing and manufacturing high quality commercial refrigerators / freezers. Full range of products are produced in fully-equipped modern facilities located in Chuzhou Modern Industrial Park in the Anhui province in China.



We provide a wide range of products to the international market including stainless steel upright refrigerators and freezers, under counter freezers etc which are covers most of the commercial refrigeration industry needs. We strive to provide first-class products and services to meet various customers' need.Excellence and reliability are our greatest priority.

REACH-IN SINGLE SOLID DOOR REFRIGERATOR / FREEZER SERIES



AKR-06881 & AKF-06881

Specific Features

Intelligent Digital Temperature Controller

Precise control temperature based on user demand

Monoblock Stable Refrigeration System

Keep food fresh at required temperature, easy pull out for maintenance and cleaning

Environment-friendly Refrigerant R290

CFC free refrigerant, more efficient than other refrigerant

Adjustable Shelves

Heavy-duty PVC coated shelves

Internal Round Corner Design

No water leaking, easy for cleaning, ensure the food safety

Pre-installed Lockable Castors

Heavy-duty 4 castors, 2 with brake

Interior Food Grade 304 Stainless Steel

Ensure the food safety




3 years warranty

Options

MODEL	AKR-06881	AKF-06881
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension (W x D x H)	27 x 32.09 x 81.30 inches	27 x 32.09 x 81.30 inches
	686 x 815 x 2065 mm	686 x 815 x 2065 mm
Capacity(cu.ft.)/L	17.2 487 L	17.2 487 L
Doors No.	1	1
Door Handle	Optional	Optional
Shelves No.	3	3
Lock	Yes	Yes
Temperature Range	33 ~ 40°F 0.5 ~ 4°C	-8 ~ 0°F -22 ~ -18°C
Ambient Temperature	38°C / 60%RH	38°C / 60%RH
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Interior light	LED	LED
Castors	4 wheels, 2 with brake	4 wheels, 2 with brake
Refrigerant	R290	R290
Voltage	115V / 60Hz / 1P	115V / 60Hz / 1P

2D

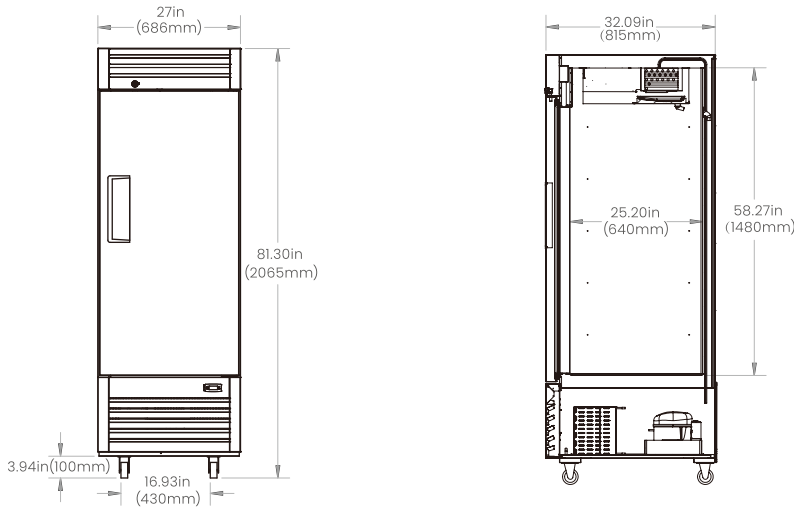

REACH-IN 2 SOLID DOORS REFRIGERATOR / FREEZER SERIES



AKR-13781 & AKF-13781

Specific Features

Intelligent Digital Temperature Controller

Precise control temperature based on user demand

Monoblock Stable Refrigeration System

Keep food fresh at required temperature, easy pull out for maintenance and cleaning

Environment-friendly Refrigerant R290

CFC free refrigerant, more efficient than other refrigerant

Adjustable Shelves

Heavy-duty PVC coated shelves

Internal Round Corner Design

No water leaking, easy for cleaning, ensure the food safety

Pre-installed Lockable Castors

Heavy-duty 4 castors, 2 with brake

Interior Food Grade 304 Stainless Steel

Ensure the food safety




3 years warranty

Options

MODEL	AKR-13781	AKF-13781
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension (W x D x H)	54 x 32.09 x 81.30 inches	54 x 32.09 x 81.30 inches
	1370 x 815 x 2065 mm	1370 x 815 x 2065 mm
Capacity(cu.ft.)/L	41.9 1186 L	41.9 1186 L
Doors No.	2	2
Door Handle	Optional	Optional
Shelves No.	6	6
Lock	Yes	Yes
Temperature Range	33 ~ 40°F 0.5 ~ 4°C	-8 ~ 0°F -22 ~ -18°C
Ambient Temperature	38°C / 60%RH	38°C / 60%RH
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Interior light	LED	LED
Castors	4 wheels, 2 with brake	4 wheels, 2 with brake
Refrigerant	R290	R290
Voltage	115V / 60Hz / 1P	115V / 60Hz / 1P

2D

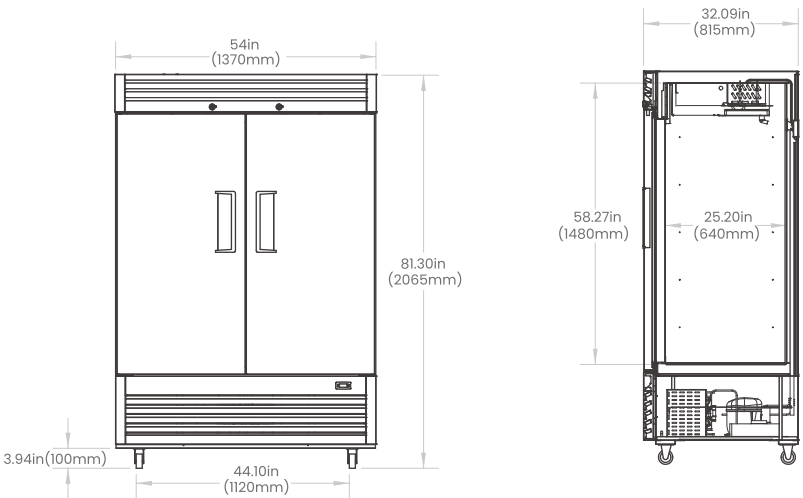

REACH-IN SLIDING GLASS DOOR (LOW-E) REFRIGERATOR SERIES



AKRG—13781

Specific Features

Intelligent Digital Temperature Controller

Precise control temperature based on user demand

Monoblock Stable Refrigeration System

Keep food fresh at required temperature, easy pull out for maintenance and cleaning

Environment-friendly Refrigerant R290

CFC free refrigerant, more efficient than other refrigerant

Adjustable Shelves

Heavy-duty PVC coated shelves, 3 shelves as standard

Internal Round Corner Design

No water leaking, easy for cleaning, ensure the food safety

Pre-installed Lockable Castors

Heavy-duty 4 castors, 2 with brake

Interior Food Grade 304 Stainless Steel

Ensure the food safety




3 years warranty

Options

MODEL	AKRG-13781		
Cooling Type	Ventilated		-
Defrosting Mode	Automatic		-
Exterior Dimension (W x D x H)	54 x 32.09 x 81.30 inches		-
	1370 x 815 x 2065 mm		-
Capacity(cu.ft.)/L	41.9	1186 L	-
Doors No.	2		-
Door Handle	Optional		-
Shelves No.	6		-
Lock	Yes		-
Temperature Range	33 ~ 40°F	0.5 ~ 4°C	-
Ambient Temperature	38°C / 60%RH		-
Int./Ext Finish	SUS304 / SUS201		-
Interior light	LED		-
Castors	4 wheels, 2 with brake		-
Refrigerant	R290		-
Voltage	115V / 60Hz / 1P		-

2D

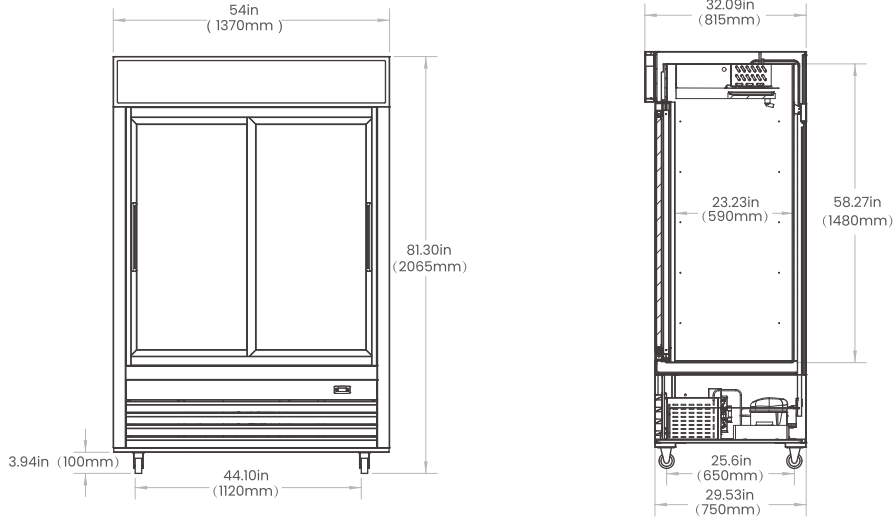

UNDERCOUNTER SINGLE SOLID DOOR REFRIGERATOR / FREEZER SERIES



AUR-0776 & AUF-0776

Specific Features

- Intelligent Digital Temperature Controller**
Precise control temperature based on user demand
- Stable High Efficient Refrigeration System(back mounted)**
Keep food fresh at required temperature at
- Environment-friendly Refrigerant R290**
CFC free refrigerant, more efficient than other refrigerant
- Adjustable Shelves**
Heavy-duty PVC coated shelves
- Internal Round Corner Design**
No water leaking, easy for cleaning, ensure the food safety
- Pre-installed Lockable Castors**
Heavy-duty 4 castors, 2 with brake
- Interior Food Grade 304 Stainless Steel**
Ensure the food safety




3 years warranty

Options

MODEL	AUR-0776	AUF-0776
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension (W x D x H)	27.6 x 30.1 x 35.8 inches	27.6 x 30.1 x 35.8 inches
	702 x 765 x 910 mm	702 x 765 x 910 mm
Capacity(cu.ft.)/L	7.2 204 L	7.2 204 L
Doors No.	1	1
Door Handle	Optional	Optional
Shelves No.	1	1
Lock	NO	NO
Temperature Range	33 ~ 40°F 0.5 ~ 4°C	-8 ~ 0°F -22 ~ -18°C
Ambient Temperature	38°C / 60%RH	38°C / 60%RH
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Castors	4 wheels, 2 with brake	4 wheels, 2 with brake
Refrigerant	R290	R290
Voltage	115V / 60Hz / 1P	115V / 60Hz / 1P

2D

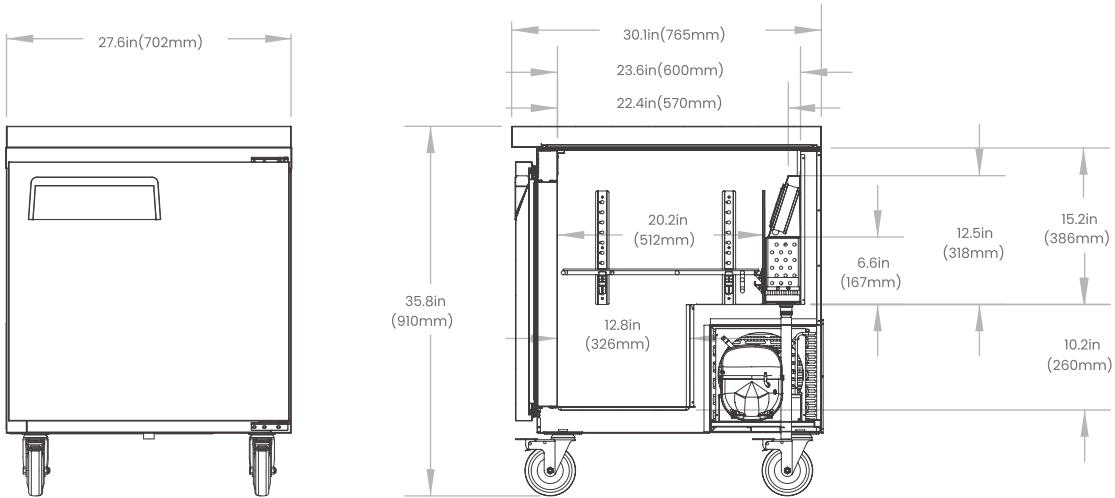

UNDERCOUNTER 2 SOLID DOORS REFRIGERATOR / FREEZER SERIES



AUR-0976 & AUF-0976

Specific Features

- Intelligent Digital Temperature Controller**
Precise control temperature based on user demand
- Stable High Efficient Refrigeration System(back mounted)**
Keep food fresh at required temperature at
- Environment-friendly Refrigerant R290**
CFC free refrigerant, more efficient than other refrigerant
- Adjustable Shelves**
Heavy-duty PVC coated shelves
- Internal Round Corner Design**
No water leaking, easy for cleaning, ensure the food safety
- Pre-installed Lockable Castors**
Heavy-duty 4 castors, 2 with brake
- Interior Food Grade 304 Stainless Steel**
Ensure the food safety




3 years warranty

Options

MODEL	AUR-0976	AUF-0976
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension (W x D x H)	36.4 x 30.1 x 35.8 inches	36.4 x 30.1 x 35.8 inches
	924 x 765 x 910 mm	924 x 765 x 910 mm
Capacity(cu.ft.)/L	9.68 274 L	9.68 274 L
Doors No.	2	2
Door Handle	Optional	Optional
Shelves No.	2	2
Lock	NO	NO
Temperature Range	33 ~ 40°F 0.5 ~ 4°C	-8 ~ 0°F -22 ~ -18°C
Ambient Temperature	38°C / 60%RH	38°C / 60%RH
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Castors	4 wheels, 2 with brake	4 wheels, 2 with brake
Refrigerant	R290	R290
Voltage	115V / 60Hz / 1P	115V / 60Hz / 1P

2D

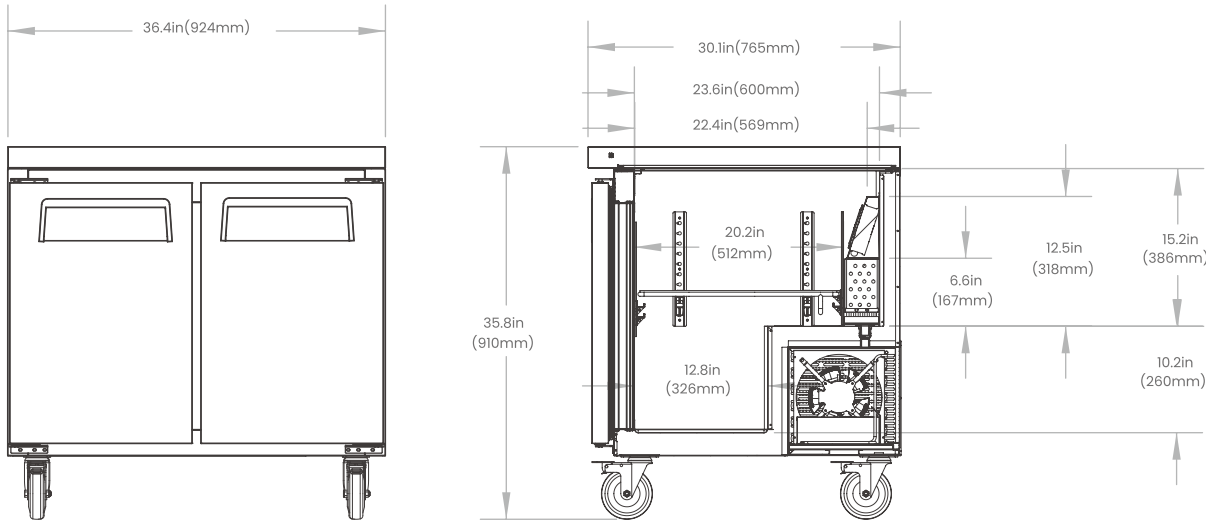

UNDERCOUNTER 2 SOLID DOORS REFRIGERATOR / FREEZER SERIES



AUR-12376 & AUF-12376

Specific Features

- Intelligent Digital Temperature Controller**
Precise control temperature based on user demand
- Stable High Efficient Refrigeration System(back mounted)**
Keep food fresh at required temperature at
- Environment-friendly Refrigerant R290**
CFC free refrigerant, more efficient than other refrigerant
- Adjustable Shelves**
Heavy-duty PVC coated shelves
- Internal Round Corner Design**
No water leaking, easy for cleaning, ensure the food safety
- Pre-installed Lockable Castors**
Heavy-duty 4 castors, 2 with brake
- Interior Food Grade 304 Stainless Steel**
Ensure the food safety




3 years warranty

Options

MODEL	AUR-12376	AUF-12376
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension (W x D x H)	48.4 x 30.1 x 35.8 inches 1230 x 765 x 910 mm	48.4 x 30.1 x 35.8 inches 1230 x 765 x 910 mm
Capacity(cu.ft.)/L	12.96 367 L	12.96 367 L
Doors No.	2	2
Door Handle	Optional	Optional
Shelves No.	2	2
Lock	Yes	Yes
Temperature Range	33 ~ 40°F 0.5 ~ 4°C	-8 ~ 0°F -22 ~ -18°C
Ambient Temperature	38°C / 60%RH	38°C / 60%RH
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Castors	4 wheels, 2 with brake	4 wheels, 2 with brake
Refrigerant	R290	R290
Voltage	115V / 60Hz / 1P	115V / 60Hz / 1P

2D

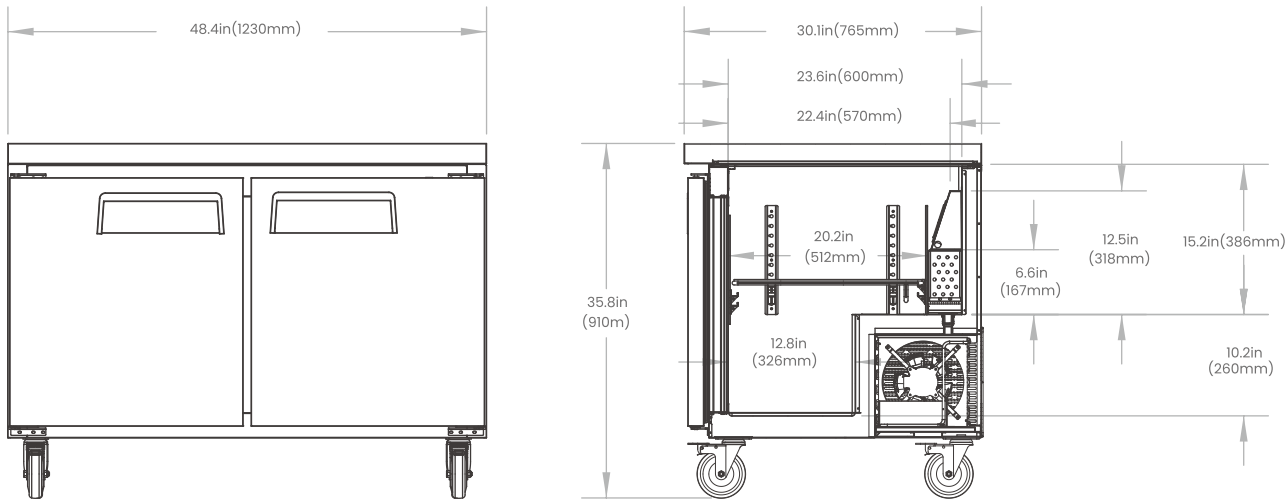

UNDERCOUNTER 2 SOLID DOORS REFRIGERATOR / FREEZER SERIES



AUR-15376 & AUF-15376

Specific Features

- Intelligent Digital Temperature Controller**
Precise control temperature based on user demand
- Stable High Efficient Refrigeration System(back mounted)**
Keep food fresh at required temperature at
- Environment-friendly Refrigerant R290**
CFC free refrigerant, more efficient than other refrigerant
- Adjustable Shelves**
Heavy-duty PVC coated shelves
- Internal Round Corner Design**
No water leaking, easy for cleaning, ensure the food safety
- Pre-installed Lockable Castors**
Heavy-duty 4 castors, 2 with brake
- Interior Food Grade 304 Stainless Steel**
Ensure the food safety




3 years warranty

Options

MODEL	AUR-15376	AUF-15376
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension (W x D x H)	60.4 x 30.1 x 35.8 inches 1535 x 765 x 910 mm	60.4 x 30.1 x 35.8 inches 1535 x 765 x 910 mm
Capacity(cu.ft.)/L	16.6 470 L	16.6 470 L
Doors No.	2	2
Door Handle	Optional	Optional
Shelves No.	2	2
Lock	Yes	Yes
Temperature Range	33 ~ 40°F 0.5 ~ 4°C	-8 ~ 0°F -22 ~ -18°C
Ambient Temperature	38°C / 60%RH	38°C / 60%RH
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Castors	4 wheels, 2 with brake	4 wheels, 2 with brake
Refrigerant	R290	R290
Voltage	115V / 60Hz / 1P	115V / 60Hz / 1P

2D

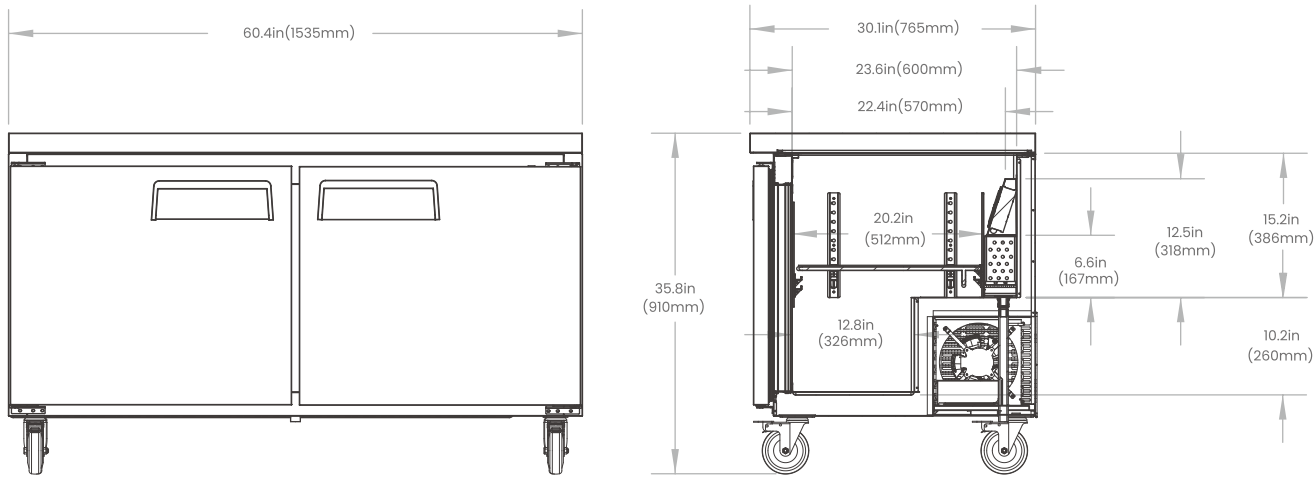

UNDERCOUNTER 3 SOLID DOORS REFRIGERATOR / FREEZER SERIES



AUR-18476 & AUF-18476

Specific Features

- Intelligent Digital Temperature Controller**
Precise control temperature based on user demand
- Stable High Efficient Refrigeration System(back mounted)**
Keep food fresh at required temperature at
- Environment-friendly Refrigerant R290**
CFC free refrigerant, more efficient than other refrigerant
- Adjustable Shelves**
Heavy-duty PVC coated shelves
- Internal Round Corner Design**
No water leaking, easy for cleaning, ensure the food safety
- Pre-installed Lockable Castors**
Heavy-duty 4 castors, 2 with brake
- Interior Food Grade 304 Stainless Steel**
Ensure the food safety




3 years warranty

Options

MODEL	AUR-18476	AUF-18476
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension (W x D x H)	72.4 x 30.1 x 35.8 inches	72.4 x 30.1 x 35.8 inches
	1840 x 765 x 910 mm	1840 x 765 x 910 mm
Capacity(cu.ft.)/L	20.27 574 L	20.27 574 L
Doors No.	3	3
Door Handle	Optional	Optional
Shelves No.	3	3
Lock	NO	NO
Temperature Range	33 ~ 40°F 0.5 ~ 4°C	-8 ~ 0°F -22 ~ -18°C
Ambient Temperature	38°C / 60%RH	38°C / 60%RH
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Castors	4 wheels, 2 with brake	4 wheels, 2 with brake
Refrigerant	R290	R290
Voltage	115V / 60Hz / 1P	115V / 60Hz / 1P

2D

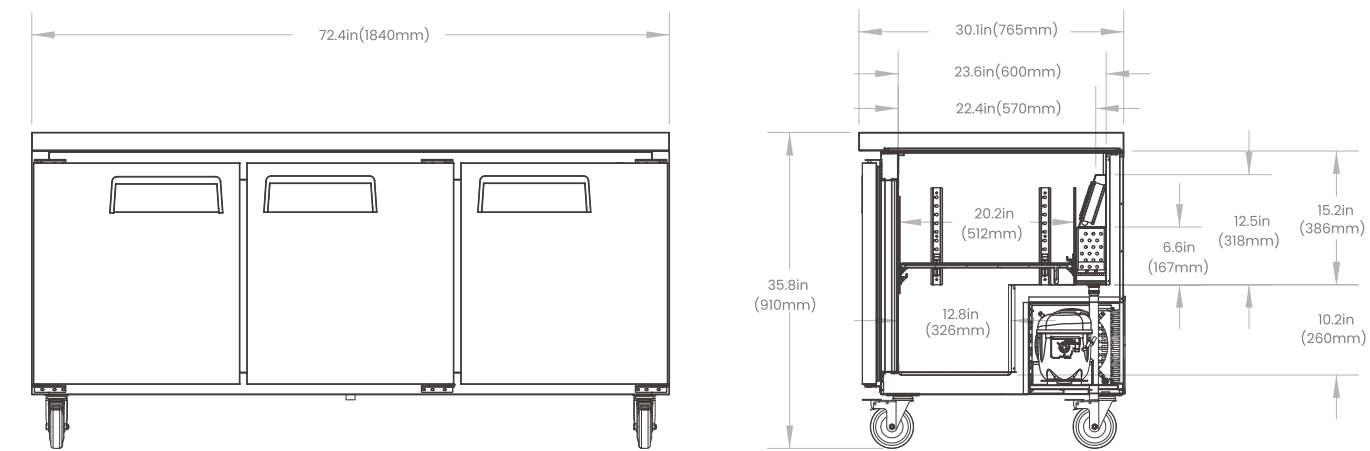

STANDARD SANDWICH PREP TABLES SERIES



Specific Features



- Intelligent Digital Temperature Controller**
Precise control temperature based on user demand
- Stable High Efficient Refrigeration System (back mounted)**
Keep food fresh at required temperature at
- Environment-friendly Refrigerant R290**
CFC free refrigerant, more efficient than other refrigerant
- Adjustable Shelves**
Heavy-duty PVC coated shelves
- Internal Round Corner Design**
No water leaking, easy for cleaning, ensure the food safety
- Pre-installed Lockable Castors**
Heavy-duty 4 castors, 2 with brake
- Interior Food Grade 304 Stainless Steel**
Ensure the food safety



3 years warranty

Options

MODEL	ASR-0776	ASR-0976
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension (W x D x H)	27.6 x 30.1 x 43.3 inches 702 x 765 x 1100 mm	36.4 x 30.1 x 43.3 inches 924 x 765 x 1100 mm
Capacity (cu.ft.)/L	7.2 204 L	9.68 274 L
Doors No.	1	2
Door Handle	Optional	Optional
Shelves No.	1	2
Lock	NO	NO
Temperature Range	33 ~ 40°F 0.5 ~ 4°C	33 ~ 40°F 0.5 ~ 4°C
Ambient Temperature	38°C / 60%RH	38°C / 60%RH
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Castors	4 wheels, 2 with brake	4 wheels, 2 with brake
Refrigerant	R290	R290
GN Pans	1 / 6 (6pcs) + 1 / 9 (2pcs)	1 / 6 (10pcs)
Voltage	115V / 60Hz / 1P	115V / 60Hz / 1P

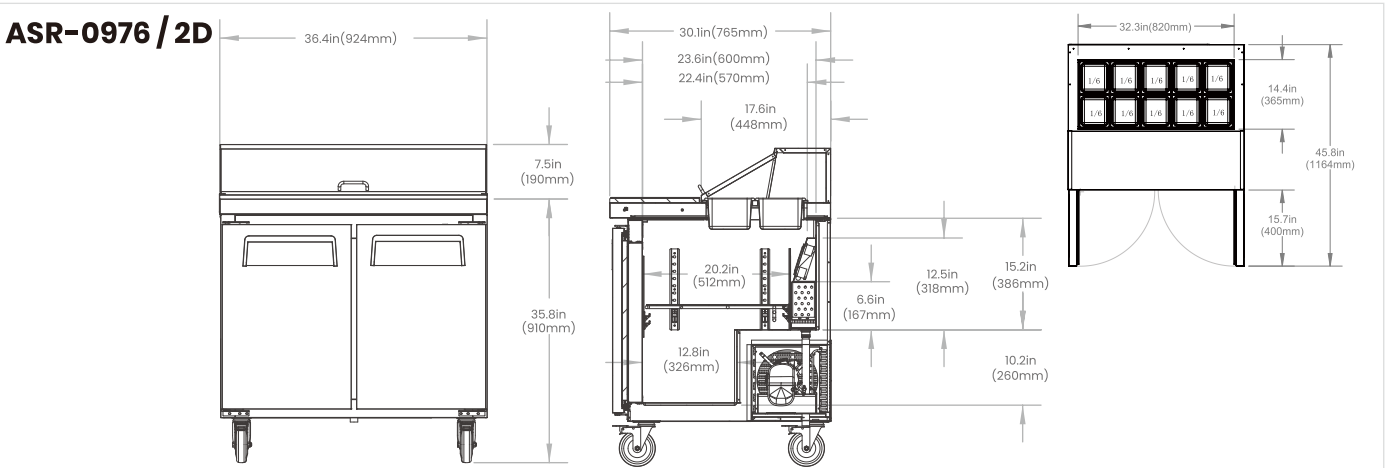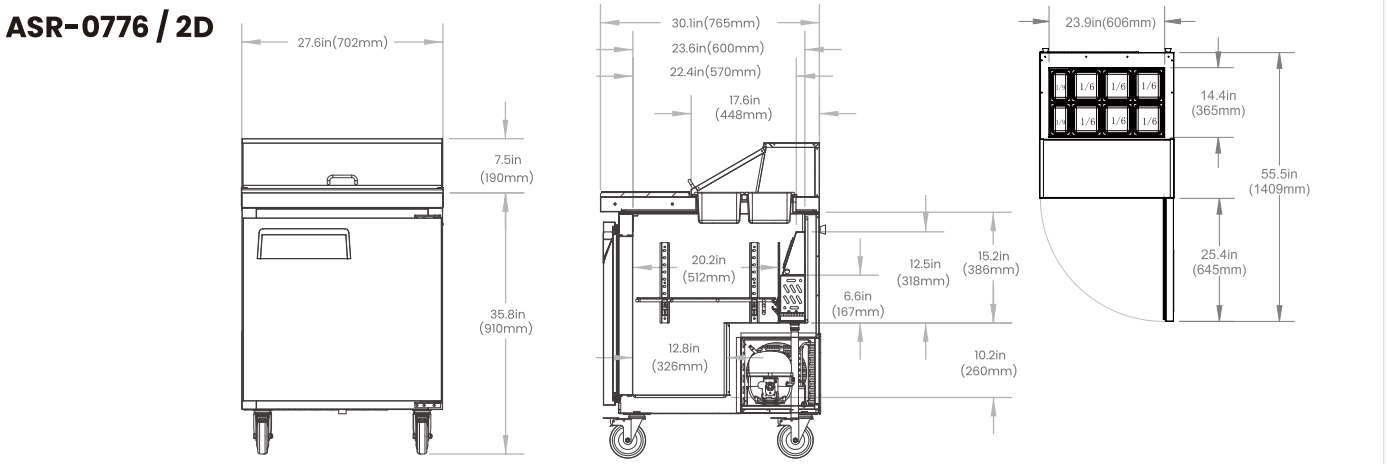

STANDARD SANDWICH PREP TABLES SERIES



Specific Features

- Intelligent Digital Temperature Controller**
Precise control temperature based on user demand
- Stable High Efficient Refrigeration System(back mounted)**
Keep food fresh at required temperature at
- Environment-friendly Refrigerant R290**
CFC free refrigerant, more efficient than other refrigerant
- Adjustable Shelves**
Heavy-duty PVC coated shelves
- Internal Round Corner Design**
No water leaking, easy for cleaning, ensure the food safety
- Pre-installed Lockable Castors**
Heavy-duty 4 castors, 2 with brake
- Interior Food Grade 304 Stainless Steel**
Ensure the food safety




3 years warranty


Options

MODEL	ASR-12376	ASR-15376	ASR-18476
Cooling Type	Ventilated	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic	Automatic
Exterior Dimension (W x D x H)	48.4 x 30.1 x 43.3 inches 1230 x 765 x 1100 mm	60.4 x 30.1 x 43.3 inches 1535 x 765 x 1100 mm	72.4 x 30.1 x 43.3 inches 1840 x 765 x 1100 mm
Capacity(cu.ft.)/L	12.96 367 L	16.6 470 L	20.27 574 L
Doors No.	2	2	3
Door Handle	Optional	Optional	Optional
Shelves No.	2	2	3
Lock	NO	NO	NO
Temperature Range	33 ~ 40°F 0.5 ~ 4°C	33 ~ 40°F 0.5 ~ 4°C	33 ~ 40°F 0.5 ~ 4°C
Ambient Temperature	38°C / 60%RH	38°C / 60%RH	38°C / 60%RH
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201	SUS304 / SUS201
Castors	4 wheels, 2 with brake	4 wheels, 2 with brake	4 wheels, 2 with brake
Refrigerant	R290	R290	R290
GN Pans	1 / 6(12pcs)	1 / 6(16pcs)	1 / 6(18pcs)
Voltage	115V / 60Hz / 1P	115V / 60Hz / 1P	115V / 60Hz / 1P


ASR-12376 / 2D

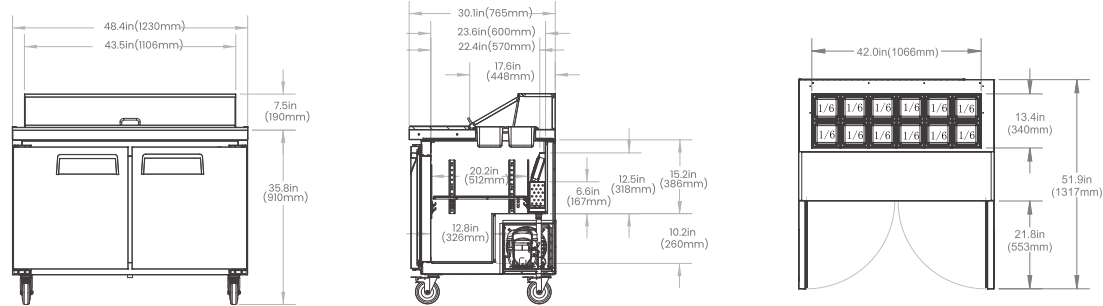

ASR-15376 / 2D

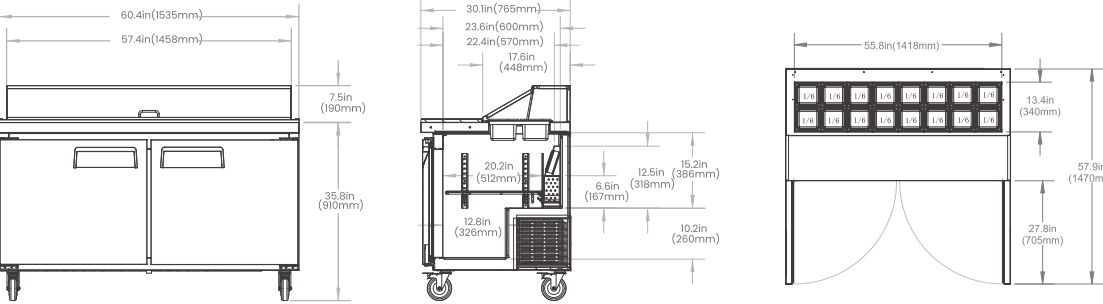

ASR-18476 / 2D

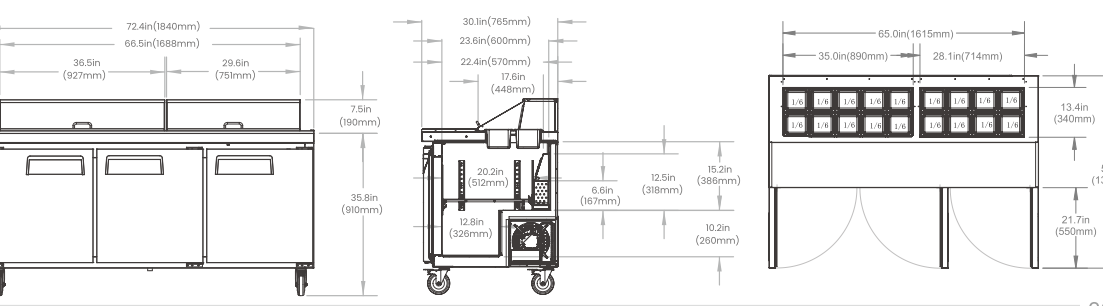

MEGA TOP SANDWICH PREP TABLES SERIES




Specific Features

- Intelligent Digital Temperature Controller**
Precise control temperature based on user demand
- Stable High Efficient Refrigeration System(back mounted)**
Keep food fresh at required temperature at
- Environment-friendly Refrigerant R290**
CFC free refrigerant, more efficient than other refrigerant
- Adjustable Shelves**
Heavy-duty PVC coated shelves
- Internal Round Corner Design**
No water leaking, easy for cleaning, ensure the food safety
- Pre-installed Lockable Castors**
Heavy-duty 4 castors, 2 with brake
- Interior Food Grade 304 Stainless Steel**
Ensure the food safety


Options

MODEL	ASR-0786	ASR-0986
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension (W x D x H)	27.6 x 34 x 44.3 in	36.4 x 34 x 44.3 in
	702 x 864 x 1127 mm	924 x 864 x 1127mm
Capacity(cu.ft.)/L	6.1 173 L	8.7 246 L
Doors No.	1	2
Shelves No.	1	2
Lock	NO	NO
Temperature Range (°F / °C)	33 ~ 40°F 0.5 ~ 4°C	33 ~ 40°F 0.5 ~ 4°C
Ambient Temperature	38°C / 60%RH	38°C / 60%RH
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Castors	4 wheels, 2 with brake	4 wheels, 2 with brake
Refrigerant	R290	R290
GN Pans	1 / 6(9pcs) + 1 / 9 (3pcs)	1 / 6(15pcs)
Voltage	115V / 60Hz / 1P	115V / 60Hz / 1P

ASR-0786 / 2D

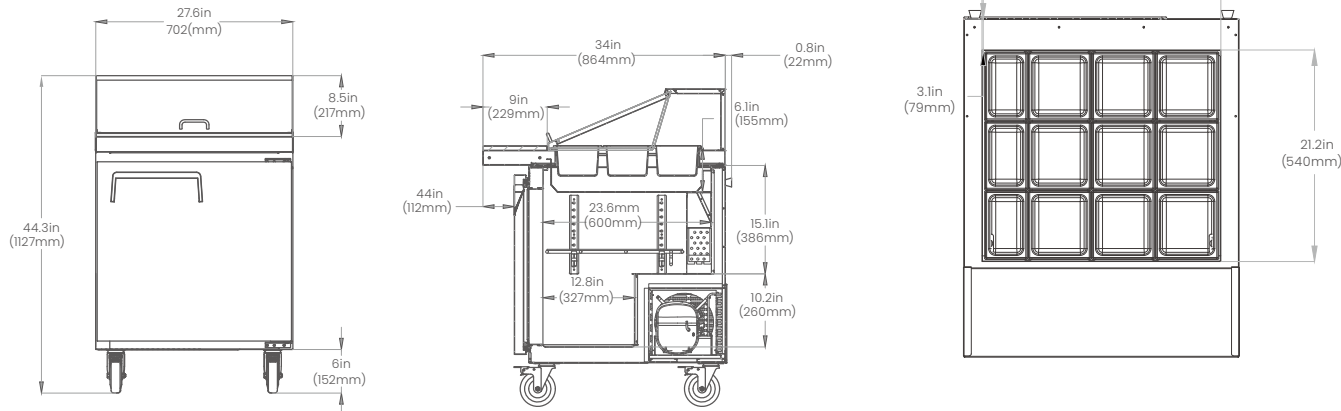

ASR-0986 / 2D

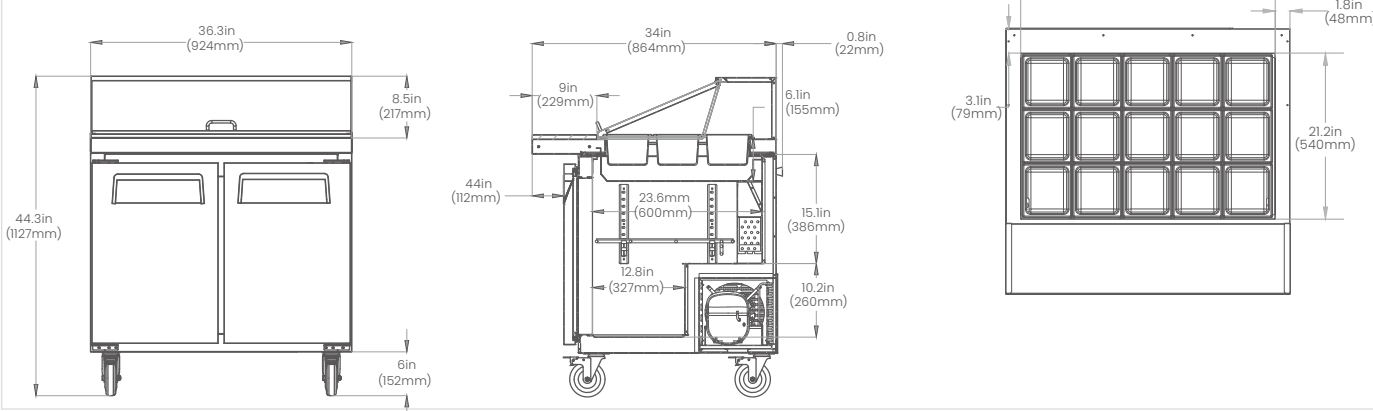

MEGA TOP SANDWICH PREP TABLES SERIES



ASR-12386

ASR-15386

ASR-18486


Specific Features

- Intelligent Digital Temperature Controller**
Precise control temperature based on user demand
- Stable High Efficient Refrigeration System (back mounted)**
Keep food fresh at required temperature at
- Environment-friendly Refrigerant R290**
CFC free refrigerant, more efficient than other refrigerant
- Adjustable Shelves**
Heavy-duty PVC coated shelves
- Internal Round Corner Design**
No water leaking, easy for cleaning, ensure the food safety
- Pre-installed Lockable Castors**
Heavy-duty 4 castors, 2 with brake
- Interior Food Grade 304 Stainless Steel**
Ensure the food safety


Options

MODEL	ASR-12386	ASR-15386	ASR-18486
Cooling Type	Ventilated	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic	Automatic
Exterior Dimension (W x D x H)	48.4 x 34 x 44.3 in	60.4 x 34 x 44.3 in	72.4 x 34 x 44.3 in
	1230 x 864 x 1127 mm	1535 x 864 x 1127 mm	1840 x 864 x 1127 mm
Capacity(cu.ft.)/L	11.4 323 L	15.2 431 L	18.4 521 L
Doors No.	2	2	3
Shelves No.	2	2	3
Lock	NO	NO	NO
Temperature Range	33 ~ 40°F 0.5 ~ 4°C	33 ~ 40°F 0.5 ~ 4°C	33 ~ 40°F 0.5 ~ 4°C
Ambient Temperature	38°C / 60%RH	38°C / 60%RH	38°C / 60%RH
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201	SUS304 / SUS201
Castors	4 wheels, 2 with brake	4 wheels, 2 with brake	4 wheels, 2 with brake
Refrigerant	R290	R290	R290
GN Pans	1 / 6(18pcs)	1 / 6(24pcs)	1 / 6(30pcs)
Voltage	115V / 60Hz / 1P	115V / 60Hz / 1P	115V / 60Hz / 1P

ASR-12386 / 2D

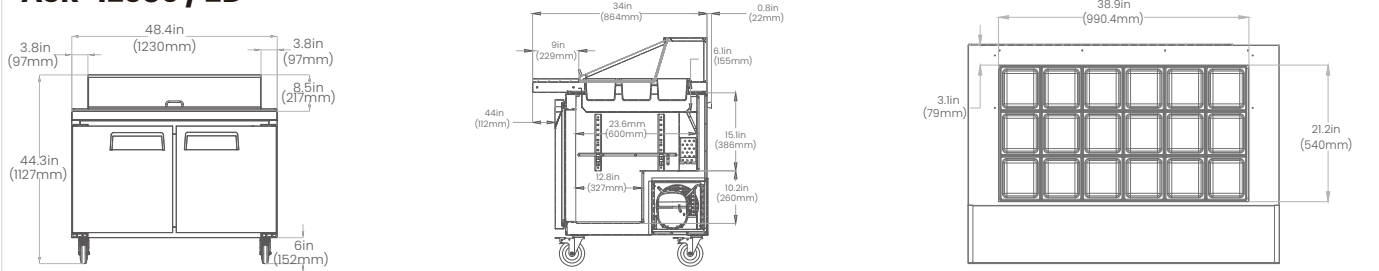

ASR-15386 / 2D

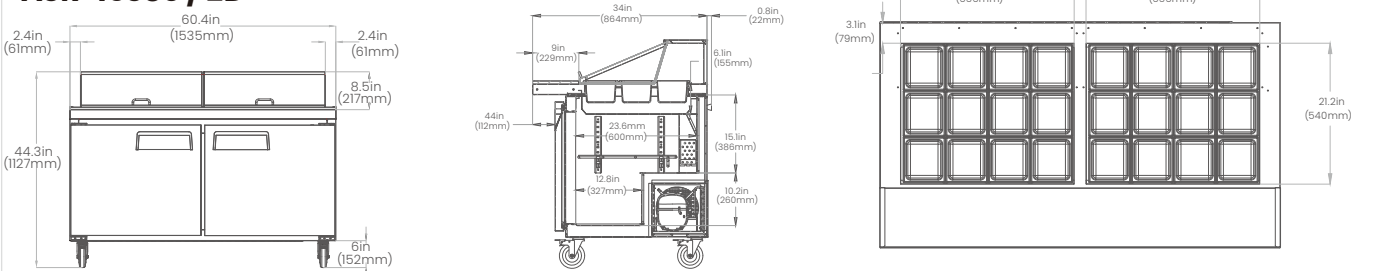

ASR-18486 / 2D

